
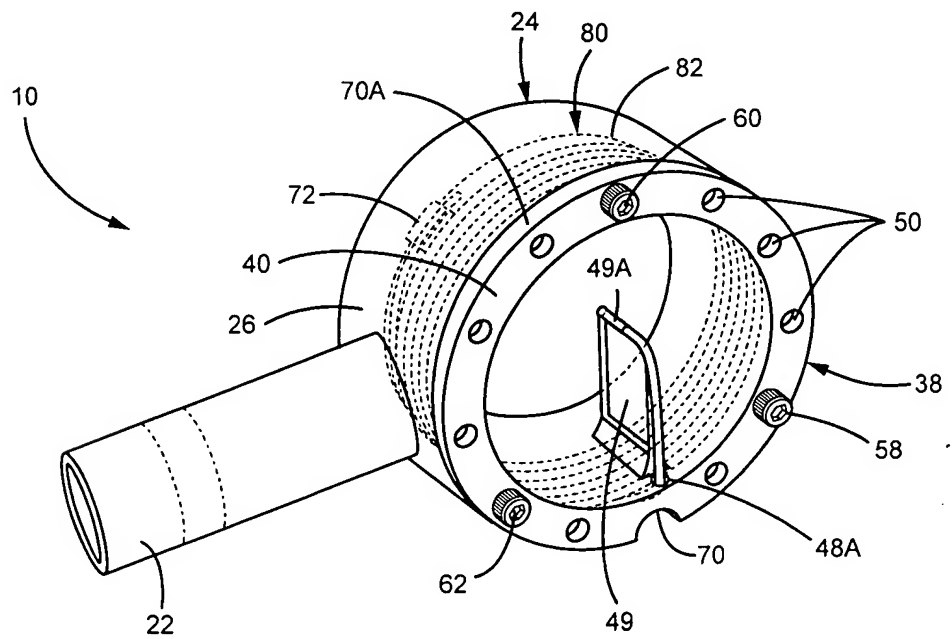


6601308

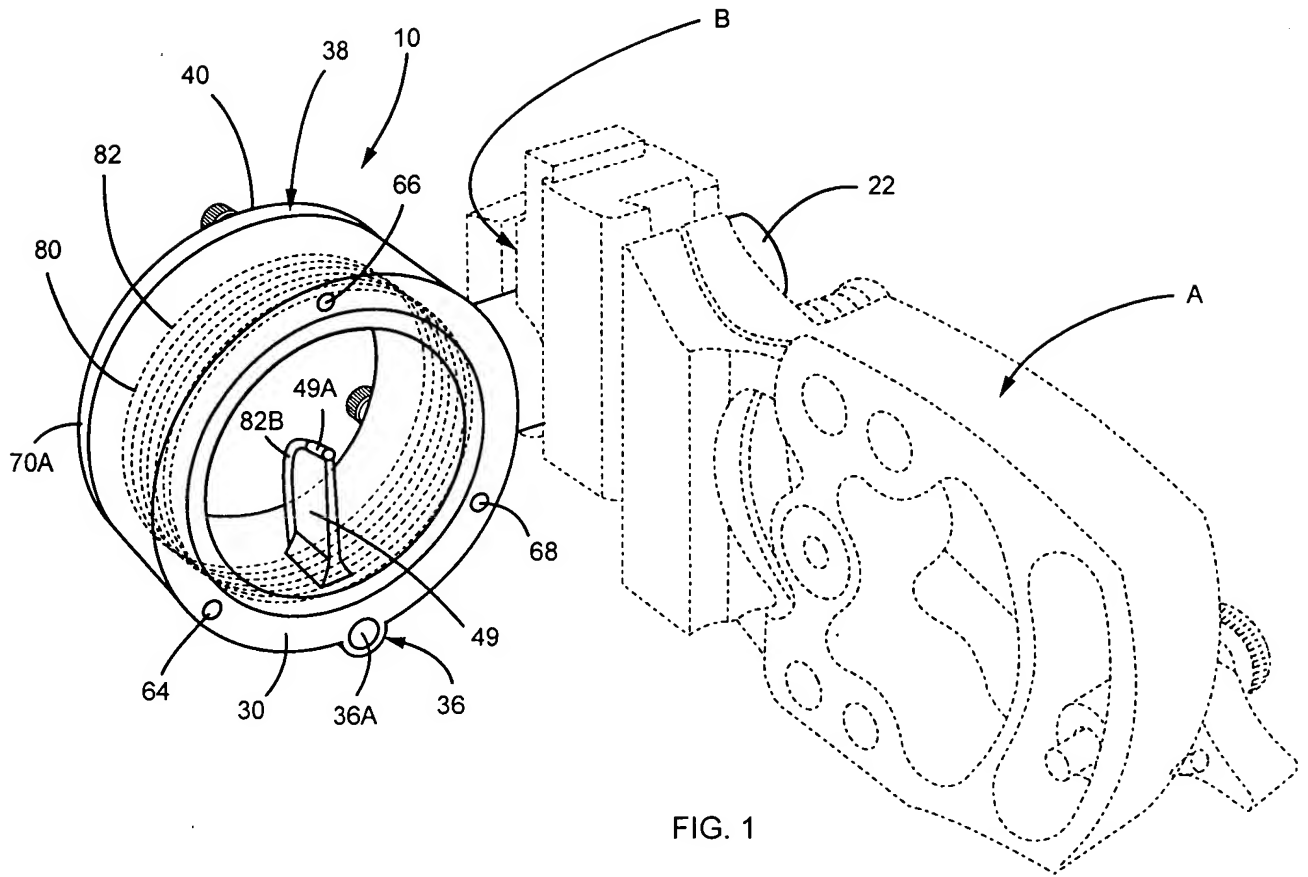

202010151010001

This exploded perspective view shows the assembly 10 in a disassembled state. It includes a cylindrical component 22, a flange-like component 20 with a central opening 24 and a flange 26, and a main body component 30. The main body 30 has a threaded section 32 and a flange 34. A cylindrical component 42 is shown with a threaded section 44 and a flange 46. A cylindrical component 48 is shown with a threaded section 49 and a flange 50. A cylindrical component 52 is shown with a threaded section 54 and a flange 56. A cylindrical component 58 is shown with a threaded section 60 and a flange 62. The assembly 10 is shown in a disassembled state, with the components 22, 20, 30, 42, 48, 52, and 58 arranged around the main body 30.

FIG. 3

2020151010202

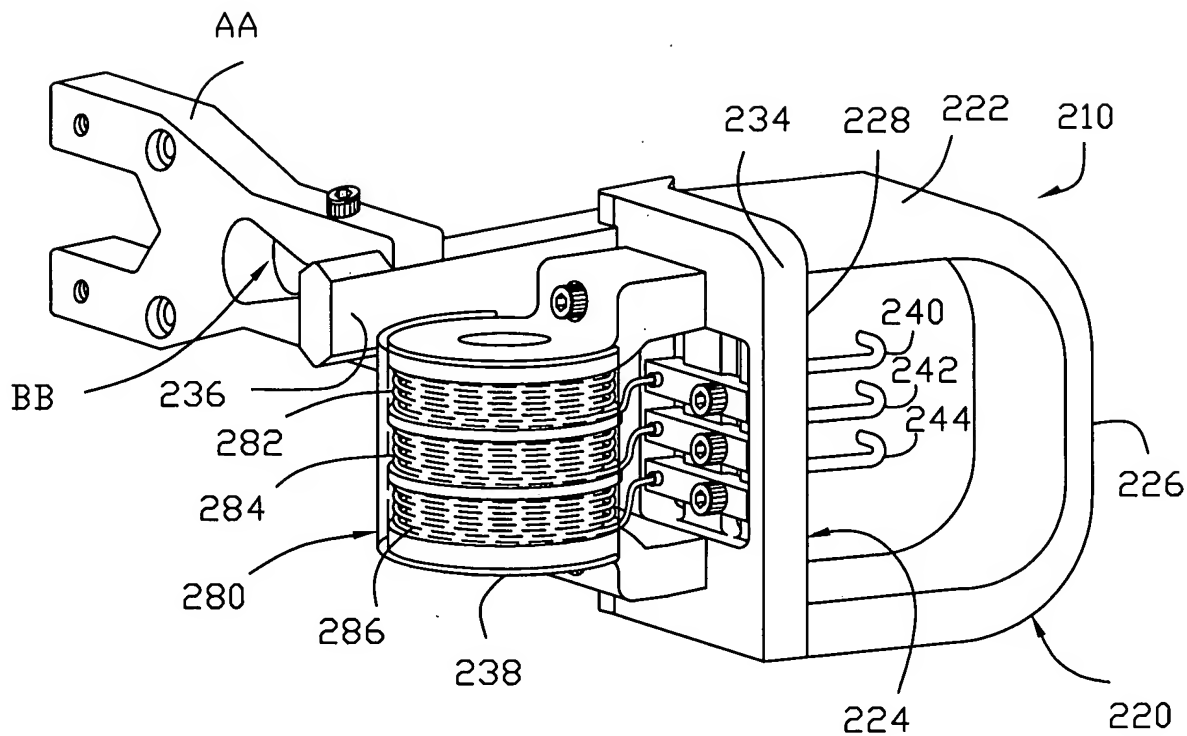


FIG. 4

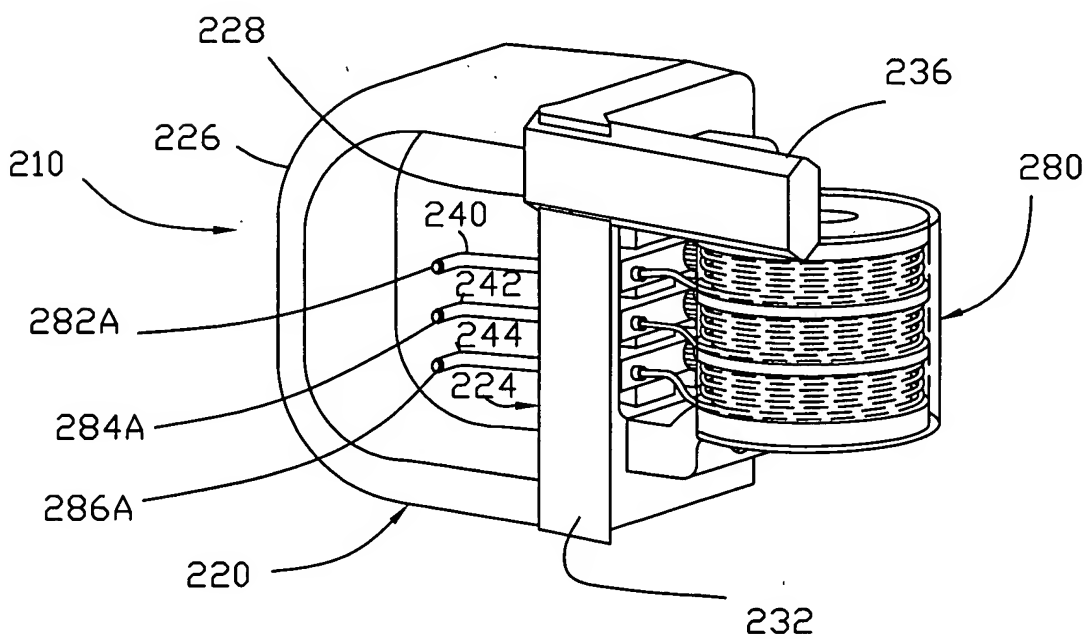


FIG. 5

10040151.010202

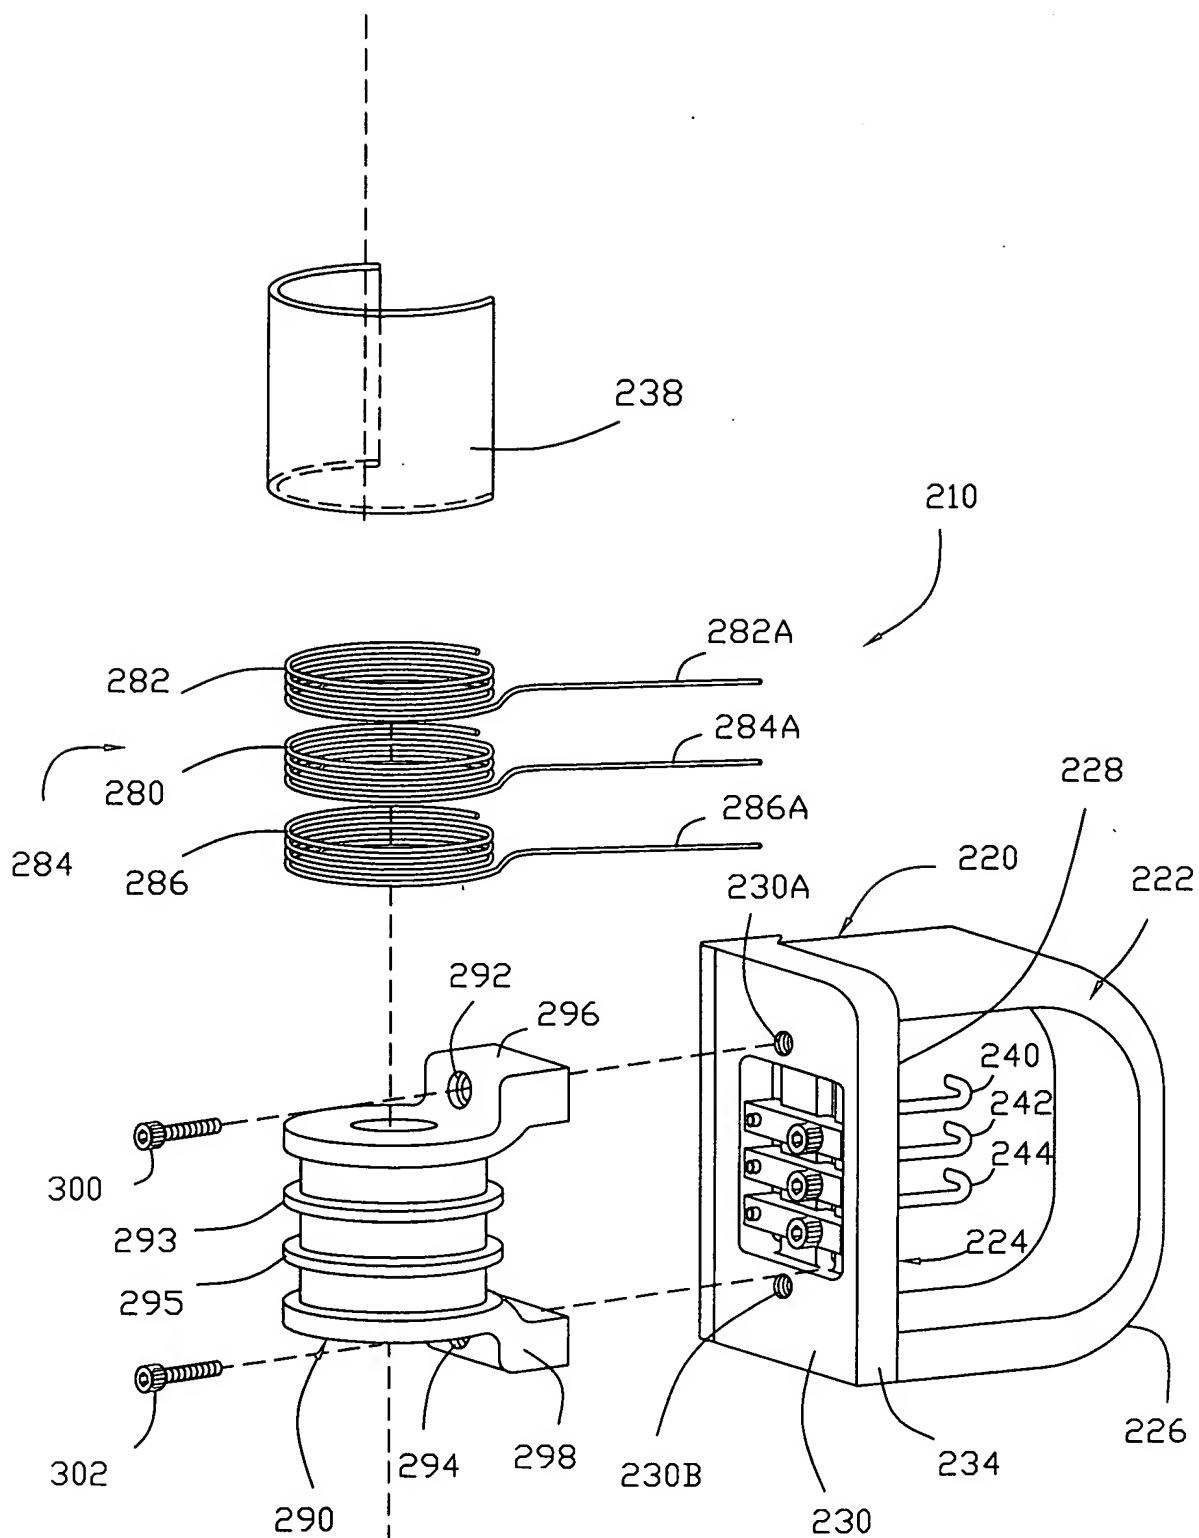


FIG. 6

20201015104001

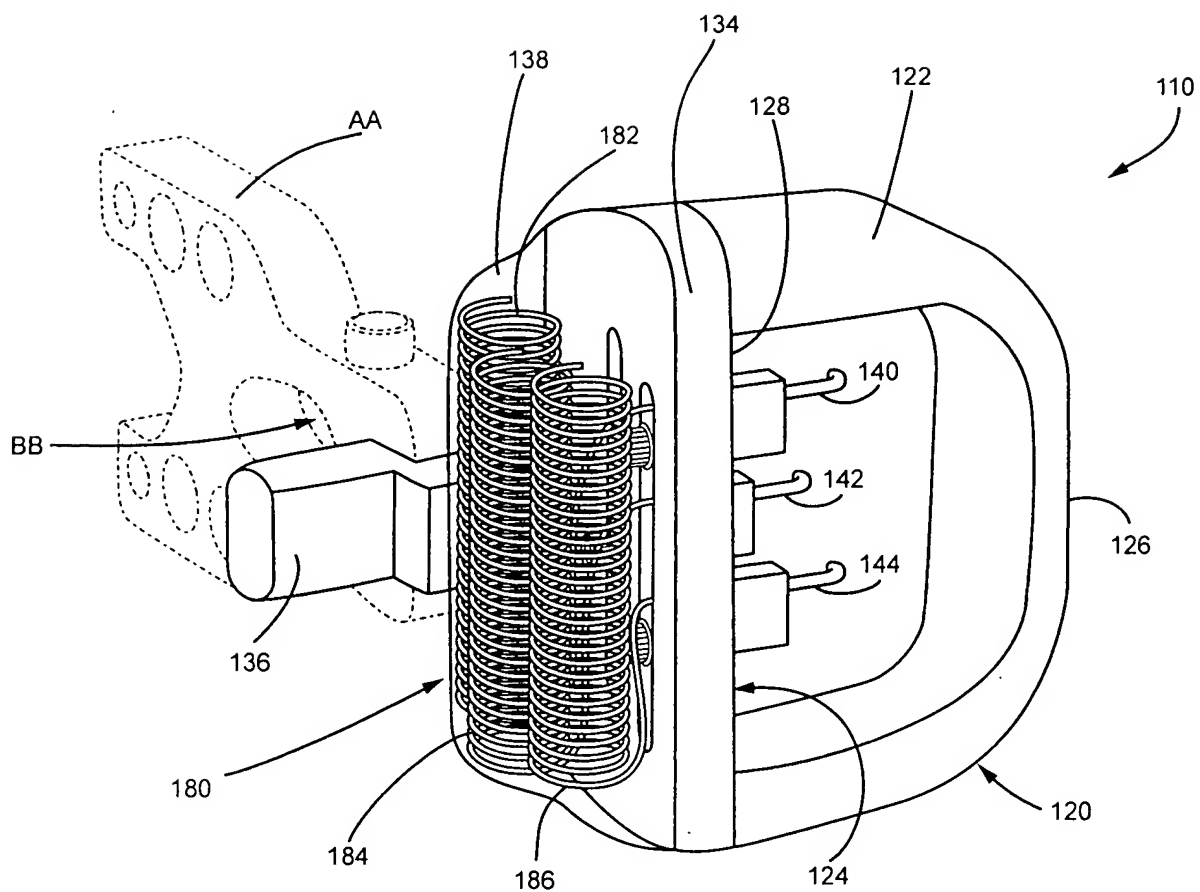


FIG. 7

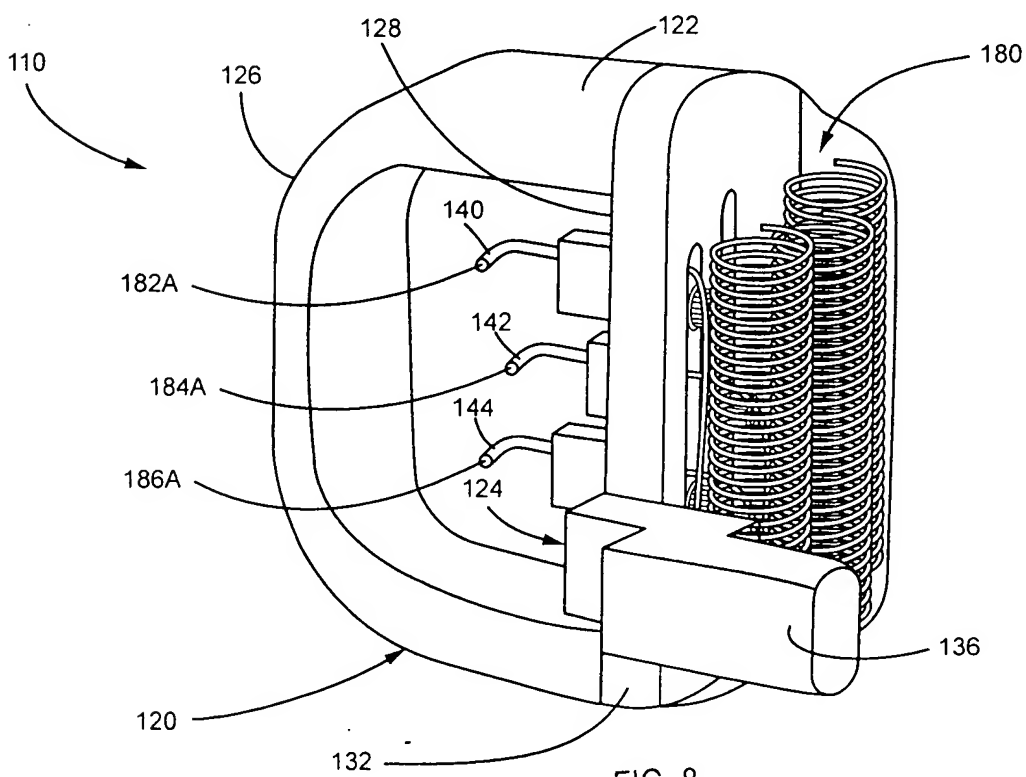


FIG. 8

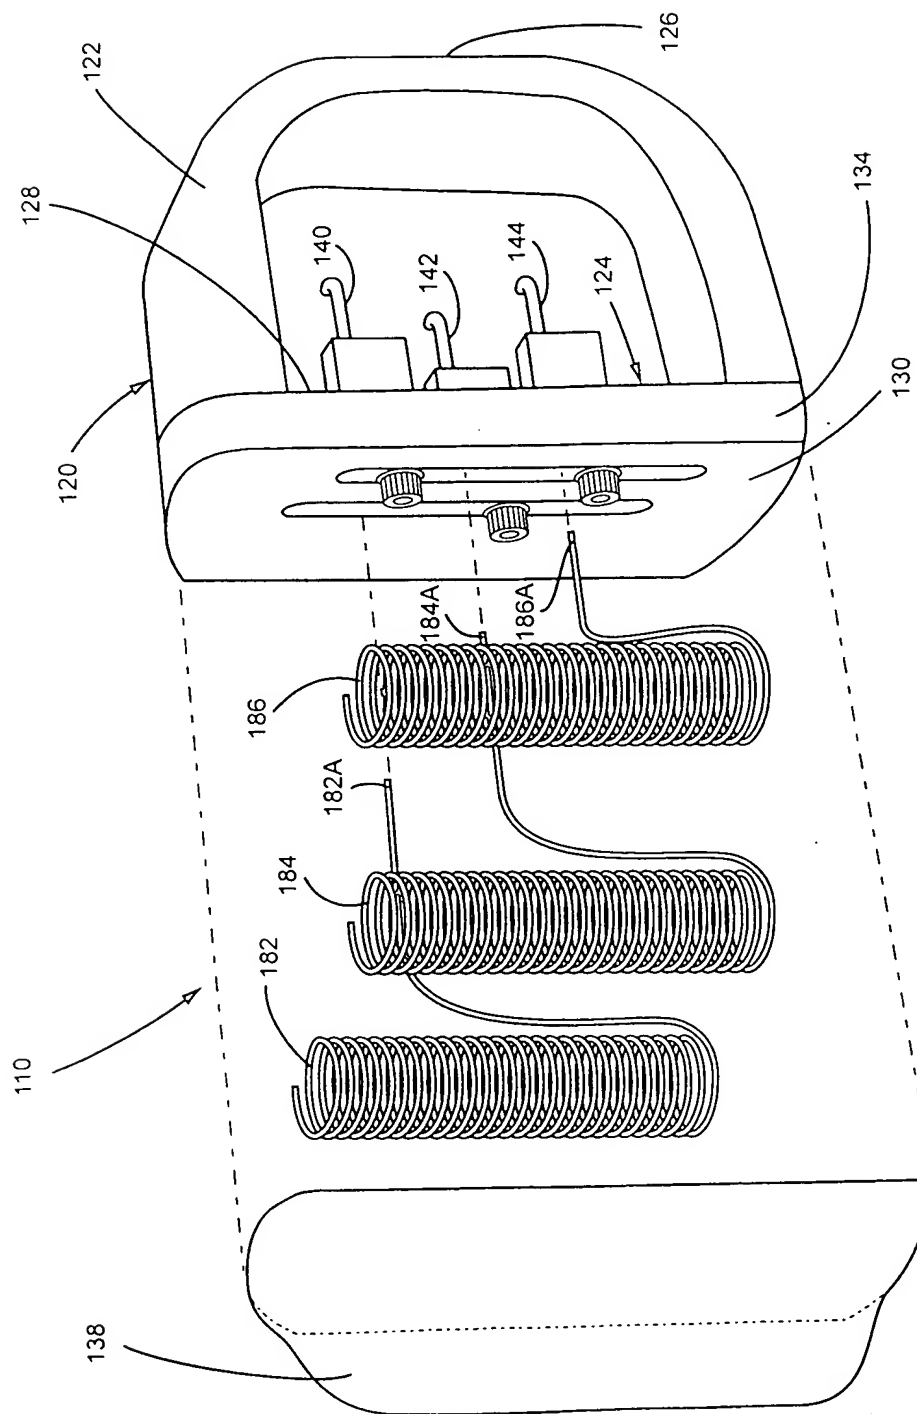


FIG. 9